

FIRE RIBBON™ with Metal Enclosure

Index # 20, Rev-33, Page 1 of 2

CVO Fire : 01325-301020 : www.cvo.co.uk : sales@cvo.co.uk

MATERIAL OPTIONS:

Supplied as a Suite with Burner, Enclosure, Fascia and optional gather.

Burner : Available for Natural Gas or LPG/Propane.

Ignition : Battery remote system (Mains upgrade available at extra cost). Handset only.

Enclosure : Highly Polished Steel. There is a separate specification for a stone version, ask for details.

Fascia Options : Choose from the CVO range of natural stones. See website or call for details.

CE APPROVAL:

The Ribbon Burner is CE approved for the following gas categories and is available for all European Countries.

- **NATURAL GAS** : I2H-G20-20mBar, I2E-G20-20mBar, NG-I2E⁺-G20/G25-20/25mBar
- **LPG/Propane** : LPG-I3P(37)-G31-37mBar

DIMENSIONS:

- **Dimensions of the surround/fascia (overall):** HEIGHT: 605mm x WIDTH: 1345mm x DEPTH: 40mm
 - Note: The stone is 20mm thick; there is a 20mm wall bracket with lower air vent hidden by the stone. This Air vent must not be blocked or the fascia mounted flush with the wall.
- **Dimensions of fire opening size (hole in centre of fascia):** HEIGHT: 265mm x WIDTH: 845mm
- **Dimensions (without Gather) using Stone Fascia:** 415 (H) x 863mm (W) x 370mm (D) (to wall face)
- **Dimensions (without Gather) using Metal Fascia:** 415 (H) x 863mm (W) x 390mm (D) (to wall face)
 - Note: If the depth of the enclosure is too big for your property then it may be possible to build a spacer to move the front face forward. Please discuss this with your sales consultant.

TECHNICAL INFORMATION:

1. The fire is supplied as a complete fireplace suite of enclosure, fascia, burner, remote system and stone fascia. There is an option gather.
2. **Natural Gas** : 12.1kw [42p/hour] **Flow Rate** : 1.5m³/Hour
3. **LPG/Propane**: 12.4kw [140p/hour] **Flow Rate**: 0.6m³/Hour
4. **VENTILATION**: This is a high power appliance and requires a 100cm² air vent in the room.
5. **PIPE WORK**: This is a high power appliance and needs a strong, steady, gas supply. See above. Ensure that pipe work is checked, flow rated and if required upgraded before installing appliance.
6. **FLUE SYSTEM**:
 - a. Natural Gas Version = minimum 2m x 175mm Flue
 - b. LPG Version = minimum 3m x 200mm Flue
 - c. A gather can be supplied to fit the fire to a flue liner. Even if a flue liner is not being used it is advised to buy the gather as it also avoids debris falling into the chamber and helps with flue draw. If the standard gather is not to be used, the fire must be connected to the inglenook in accordance with local regulations. The gather must be ordered at the same time as the fire. To help with installation the gather is designed to be installed into the fireplace opening and lowered onto the enclosure hence reducing the required builders opening.
7. ODS (Oxygen Depletion System) fitted to monitor oxygen levels in the room.
8. The fireplace must be designed with burner ventilation provided into the burner tray. This is provided by the fascia floating on the wall. If the fascia vent is blocked serious burner damage will occur.
9. The fire is operated by an "AA" battery remote system with a handset. There is an option to purchase a mains upgrade.
10. The remote is fully sequential and operates ON/OFF and UP/DOWN .
11. **NOTE: THE IMAGES SHOW THE NATURAL GAS GATHER WITH 175MM SPIGOT. LPG VERSION IS 200MM**

=====
CVO reserve the right to amend and improve the specification sheets without prior notice. If in doubt about any aspect of this specification please call. The specification is not to be used to install the fireplace. Every fire is supplied with an official install booklet. Spirit Fires Limited own the Spirit, CVO and Firevault Trademarks. Copying and distribution of these specifications is not permitted without the permission of Spirit Fires Ltd. All dimensions include a +/-2mm tolerance.

Spirit Fires Ltd, 4 Beaumont Square, Durham Way South, Newton Aycliffe, County Durham, DL5 6XN


Sales: +44 (0)1325-301020 Office: +44 (0) 1325 327 221 Fax: +(0)1325 327 292 Email: sales@cvo.co.uk Web: www.cvo.co.uk

SHOWROOM: CVO Fires can be seen live in our FIREVAULT showrooms based in the North and South of the UK. Visit www.firevault.co.uk or call 01325-301020 for full contact details, location maps and directions.

FIRE RIBBON™ with Metal Enclosure

Index # 20, Rev-33, Page 2 of 2

CVO Fire : 01325-301020 : www.cvo.co.uk : sales@cvo.co.uk

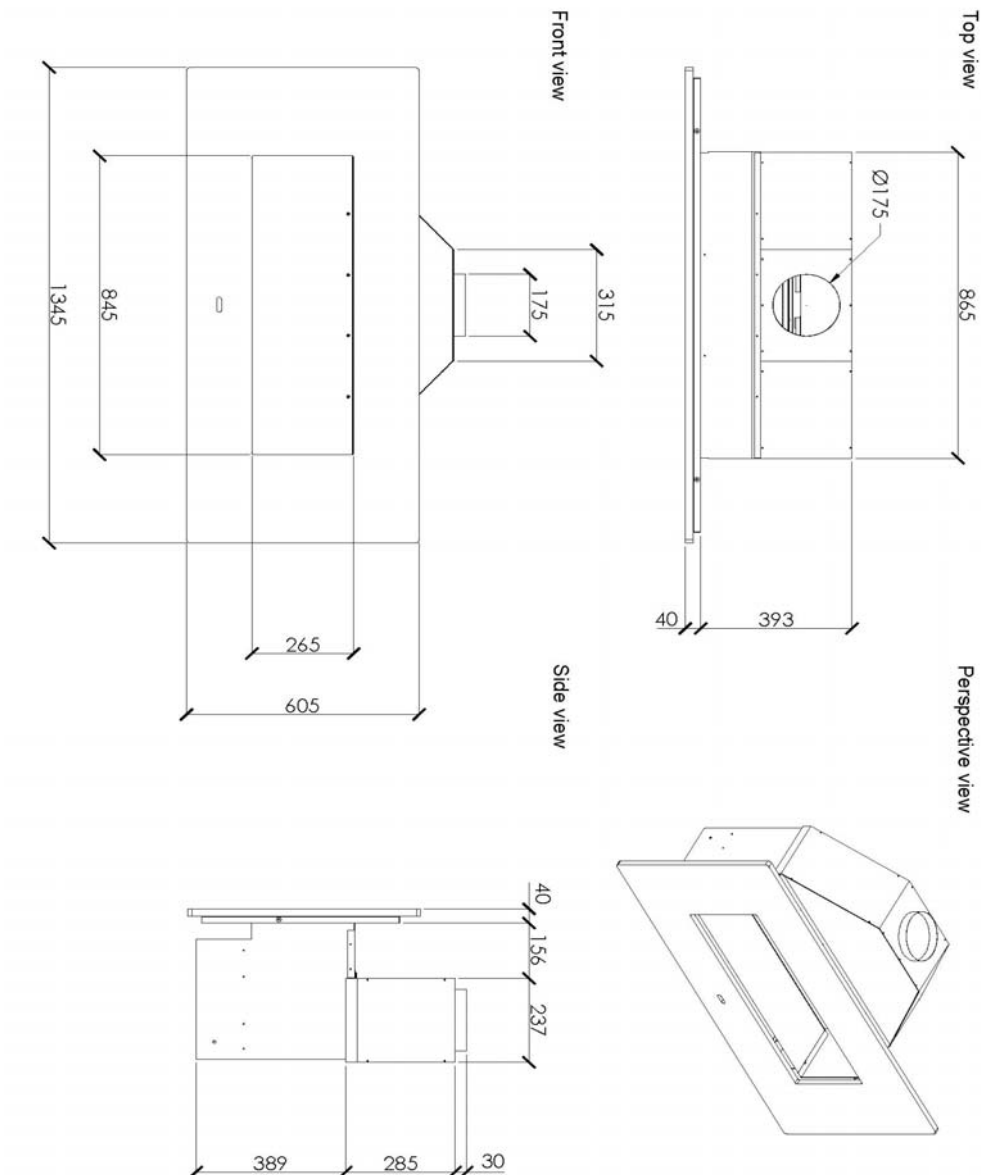

=====
CVO reserv notice. If
in doubt about any aspect of this specification please call. The specification is not to be
used to install the fireplace. Every fire is supplied with an official install booklet. Spirit
Fires Limited own the Spirit, CVO and Firevault Trademarks. Copying and distribution of these
specifications is not permitted without the permission of Spirit Fires Ltd. All dimensions
include a +/-2mm tolerance.

Spirit Fires Ltd, 4 Beaumont Square, Durham Way South, Newton Aycliffe, County Durham, DL5 6XN

Sales: +44 (0)1325-301020 Office: +44 (0) 1325 327 221 Fax: +(0)1325 327 292 Email: sales@cvo.co.uk Web: www.cvo.co.uk

SHOWROOM: CVO Fires can be seen live in our FIREVAULT showrooms based in the North and South of the UK. Visit www.firevault.co.uk or call 01325-301020 for full contact details, location maps and directions.